SIEMENS

Product data sheet 3RW3013-1BB14



SIRIUS SOFT STARTER, SIZE S00, 3.6A, 1.5KW/400V, 40 DEGREES, 200-480V AC, 110-230V AC/DC, SCREW TERMINALS

| General details: | | |
|--|--|--------|
| product brand name | | SIRIUS |
| Product equipment | | |
| integrated bridging contact system | | Yes |
| • thyristors | | Yes |
| Product function | | |
| intrinsic device protection | | No |
| motor overload protection | | No |
| evaluation of thermal resistor motor protection | | No |
| • reset external | | No |
| adjustable current limitation | | No |
| • inside-delta circuit | | No |
| Product component / outlet for enine brake | | No |
| Item designation | | |
| according to DIN EN 61346-2 | | Q |
| according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 | | G |

| • at 40 °C / rated value | Α | 3.6 |
|--|----|---------|
| • at 50 °C / rated value | Α | 3.3 |
| • at 60 °C / rated value | Α | 3 |
| Emitted mechanical power / for three-phase servomotors | | |
| • at 230 V / at standard switching / at 40 °C | | |
| • rated value | W | 700 |
| \bullet at 400 V / at standard switching / at 40 °C | | |
| • rated value | W | 1,500 |
| yielded mechanical performance (hp) / for three-phase squirrel cage motors / at 200/208 V / at standard circuit / at 50 °C / rated v | hp | 0.5 |
| alue | | |
| Operating frequency | | |
| • rated value | Hz | 50 60 |
| Relative negative tolerance / of the operating frequency | % | -10 |
| Relative positive tolerance / of the operating frequency | % | 10 |
| Operating voltage / with standard circuit / rated value | V | 200 480 |
| Relative negative tolerance / of the operating voltage / with standard circuit | % | -15 |
| Relative positive tolerance / of the operating voltage / with standard circuit | % | 10 |
| Minimum load in % of I_M | % | 10 |
| Continuous operating current in % of I_e / at 40°C | % | 115 |
| Active power loss / at operating current / at 40°C / during operating phase / typical | W | 0.25 |

| Control electronics: | | |
|---|----|---------|
| Type of voltage / of the controlled supply voltage | | AC/DC |
| Control supply voltage frequency / 1 / rated value | Hz | 50 |
| Control supply voltage frequency / 2 / rated value | Hz | 60 |
| Relative negative tolerance / of the control supply voltage frequency | % | -10 |
| Relative positive tolerance / of the control supply voltage frequency | % | 10 |
| Control supply voltage / 1 / at 50 Hz / for AC | V | 110 230 |
| Control supply voltage / 1 / at 60 Hz / for AC | V | 110 230 |
| Relative negative tolerance / of the control supply voltage / at 60 Hz / for AC | % | -20 |
| Relative positive tolerance / of the control supply voltage / at 60 Hz / for AC | % | 20 |
| Control supply voltage / 1 / for DC | V | 110 230 |
| Relative negative tolerance / of the control supply voltage / for DC | % | -20 |

| Relative positive tolerance / of the control supply voltage / for DC | % | 20 |
|--|---|-----|
| Type of display / for fault signal | | red |

| Mechanical design: | | |
|--|----|--|
| Size of the engine control device | | S00 |
| Width | mm | 45 |
| Height | mm | 95 |
| Depth | mm | 150 |
| Type of mounting | | screw and snap-on mounting |
| mounting position | | With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° tiltable to the front and back |
| Distance, to be maintained, to the ranks assembly | | |
| • upwards | mm | 60 |
| • sidewards | mm | 15 |
| • downwards | mm | 40 |
| Altitude of installation site / at a height over sea level | m | 5,000 |
| Cable length / maximum | m | 300 |
| Number of poles / for main current circuit | | 3 |

| Electrical connections: | |
|--|----------------------------------|
| Design of the electrical connection | |
| for main current circuit | screw-type terminals |
| for auxiliary and control current circuit | screw-type terminals |
| Number of NC contacts / for auxiliary contacts | 0 |
| Number of NO contacts / for auxiliary contacts | 1 |
| Number of change-over switches / for auxiliary contacts | 0 |
| Type of the connectable conductor cross-section / for main contacts / for box terminal / when using the front clamping point | |
| • solid | 2x (1 2.5 mm²), 2x (2.5 6 mm²) |
| • finely stranded / with conductor end processing | 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) |
| Type of the connectable conductor cross-section / for AWG conductors / for main contacts / for box terminal | |
| when using the front c | 2x (16 10) |
| Type of the connectable conductor cross-section | |
| for auxiliary contacts | |
| • solid | 2x (0.5 2.5 mm²) |
| finely stranded / with conductor end processing | 2x (0.5 1.5 mm²) |
| for AWG conductors / for auxiliary contacts | 2x (20 14) |
| • finely stranded / with wire end proc | 2x (20 16) |

Ambient conditions:

| Ambient temperature | | |
|----------------------|----|-----------------|
| during operating | °C | -25 +60 |
| during storage | °C | -40 + 80 |
| Derating temperature | °C | 40 |
| Protection class IP | | IP20 |

Certificates/approvals:

General Product Approval









EMC

Type Test
Certificates/Test
Report

Test Certificates

other

Declaration of Conformity

other

Environmental Confirmations

UL/CSA ratings

yielded mechanical performance (hp) / for three-phase squirrel cage motors

• at 220/230 V / at standard circuit

• at 50 °C / rated v alue

• at 460/480 V / at standard circuit

• at 50 °C / rated v alue

hp 0.5

hp 1.5

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

CAx-Online-Generator


http://www.siemens.com/cax


$Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$


http://support.automation.siemens.com/WW/view/en/3RW3013-1BB14/all

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RW3013-1BB14}}$

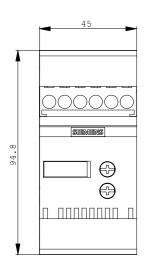

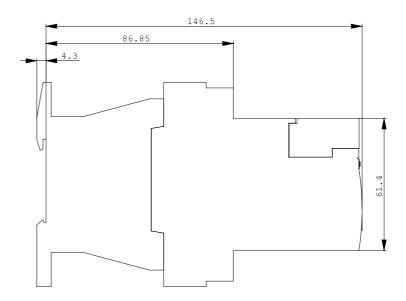

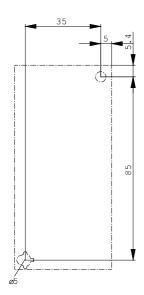

last change: May 14, 2012