## SIEMENS

## **Product data sheet**



SIRIUS, COMPACT STARTER, DIRECT STARTER 400 V, 110 ... 240 V AC/DC, 50 ... 60 HZ, 8 ... 32 A, IP20, CONNECTION MAIN CIRCUIT: SCREW TERMINAL, CONNECTION AUXILIARY CIRCUIT: SCREW TERMINAL

General technical data:			
product brand name	SIRIUS		
product designation	compact starter		
Design of the product		direct starter	
Trip class	CLASS 10 and 20 adjustable		
Product function			
<ul> <li>control circuit interface to parallel wiring</li> </ul>		Yes	
bus-communication		No	
short circuit protection		Yes	
control circuit interface with IO link	No		
Type of assignement	continous operation according to IEC 60947-6-2		
Protection class IP		IP20	
Degree of pollution		3	
mounting position / recommended	vertical, on horizontal standard mounting rail		
Installation altitude / at a height over sea level			
• maximum	m	2,000	
Ambient temperature			
during storage	°C	-55 +80	
during operating	°C	-20 +60	
during transport	°C	-55 +80	


	-			
Relative humidity				
during operating phase	%	10 90		
Resistance against shock		a=60 m/s2 (6g) with 10 ms per 3 shocks in all axes		
Resistance against vibration		f= 4 5.8 Hz, d= 15 mm; f= 5.8 500 Hz, a= 20 m/s²; 10 cycles		
Impulse voltage resistance / rated value	V	6,000		
Field-bound parasitic coupling				
according to IEC 61000-4-3		10 V/m		
Insulation voltage / rated value	V	690		
Conductor-bound parasitic coupling conductor-earth SURGE				
according to IEC 61000-4-5		4 kV main contacts, 2 kV auxiliary contacts		
Conductor-bound parasitic coupling conductor-conductor SURGE				
according to IEC 61000-4-5		2 kV main contacts, 1 kV auxiliary contacts		
Conductor-bound parasitic coupling BURST				
according to IEC 61000-4-4		4 kV main contacts, 2 kV auxiliary contacts		
Maximum permissible voltage for safe disconnection				
<ul> <li>between main circuit and auxiliary circuit</li> </ul>	V	400		
<ul> <li>between control and auxiliary circuit</li> </ul>	V	300		
<ul> <li>between auxiliary circuit and auxiliary circuit</li> </ul>	V	250		
Item designation				
<ul> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		Q		
according to DIN EN 61346-2		Q		
Main circuit:				
Operating voltage / at AC-3 / rated value				
• maximum	V	690		
Number of poles / for main current circuit		3		
Adjustable response current				
• of the current-dependent overload release	А	8 32		
Formula for making capacity limit current		12 x le		
Formula for interruption capacity limit current		10 x le		
Emitted mechanical power / for 4-pole three-phase motor				
• at 400 V / rated value	kW	15		
• at 500 V / rated value	kW	11		
• at 690 V / rated value	kW	11		
Service power / at AC-3 / at 400 V / rated value	kW	15		
Frequency of operation / at AC-41 / according to IEC 60947-6-2 / maximum	1/h	750		
Frequency of operation / at AC-43 / according to IEC 60947-6-2 / maximum	1/h	250		


Off-load operating frequency	1/h	3,600	
Mechanical operating cycles as operating time			
of the main contacts / typical		10,000,000	
of the auxiliary contacts / typical		10,000,000	
of the signal contacts / typical		10,000,000	
Control circuit:			
type of voltage		AC	
Control supply voltage / 1			
• for DC			
• initial rated value	V	110	
final rated value	V	240	
• at 50 Hz / for AC			
initial rated value	V	110	
<ul> <li>final rated value</li> </ul>	V	240	
• at 60 Hz / for AC			
• initial rated value	V	110	
final rated value	V	240	
Holding power			
• for AC / maximum	W	5.2	
• for DC / maximum	W	5.8	
Switch-off delay time	ms	50	
Start-up delay time	ms	70	

Auxiliary circuit:		
Product extension		
auxiliary switch		Yes
Number of NC contacts		
for auxiliary contacts		1
Number of NO contacts		
<ul> <li>for auxiliary contacts</li> </ul>		1
• of the non-delayed short-circuit release / for alarm contact		1
Number of changeover contacts / of the current-dependent overload release / for alarm contact		1
Operating current / of the auxiliary contacts / at AC-12		
• maximum	А	10
Electrical switching cycle as operating time / of the auxiliary contacts		
• at AC-15 / at 6 A / at 230 V / typical		500,000
• at DC-13 / at 6 A / at 24 V / typical		100,000

Electrical switching cycle as operating time / of the signal contacts		
• at AC-15 / at 6 A / at 230 V / typical		500,000
• at DC-13 / at 6 A / at 24 V / typical	at DC-13 / at 6 A / at 24 V / typical	
Short-circuit:		
Design of the fuse link / for short-circuit protection of the auxiliary switch		
• required		fuse gL/gG: 10 A
Installation/mounting/dimensions:		
Type of mounting		screw and snap-on mounting
Width	mm	45
Height	mm	170
Depth	mm	165
mounting position		any
Connections:		
Product function		
<ul> <li>removable terminal for main circuit</li> </ul>		Yes
<ul> <li>removable terminal for auxiliary and control circuit</li> </ul>		Yes
Design of the electrical connection		
for main current circuit		screw-type terminals
<ul> <li>for auxiliary and control current circuit</li> </ul>		screw-type terminals
Type of the connectable conductor cross-section		
• for main contacts		
• solid		2x (2.5 6 mm²), 1x 10 mm²
finely stranded		
<ul> <li>with conductor end processing</li> </ul>		2x (2.5 6 mm²)
for auxiliary contacts		
• solid		0.5 4 mm², 2x (0.5 2.5 mm²)
finely stranded		
<ul> <li>with conductor end processing</li> </ul>		0.5 2.5 mm², 2x (0.5 1.5 mm²)
for AWG conductors		
• for main contacts		2x (14 10), 1x 8
for auxiliary contacts		2x (20 14)
Certificates/approvals:		
Verification of suitability		IEC / EN 60947-6-2

General Product A	pproval			EMC	Functional Safety / Safety of Machinery
	(SA)	GOST		С-тіск	<u>other</u>
Test Certificates	Shipping Approv	/al			
<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>	BUREAU VERITAS		PRS	RINA	
other					
Declaration of Conformity	other	Environmental Confirmations			
UL/CSA ratings:					
yielded mechanical   cage motors	performance (hp) / f	or three-phase squirrel			
• at 200/208 V / rate	ed value		hp	7.5	
• at 220/230 V / rate	ed value		hp	10	
• at 460/480 V / rate	ed value		hp	20	
	, ,	e squirrel cage motors			
• at 480 V / rated value		A	32		
Contact rating designation / for auxiliary contacts / according to UL			contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300		
Reliability figures:	:				
B10 value				2,000,000	
Proportion of dange	rous failures		%	50	
Proportion of danger according to SN 319		low demand rate /	%	40	
Protection against electrical shock			finger-safe		
Failure rate (FIT valu 31920	ie) / with low demar	d rate / according to SN	FIT	100	
Further informatio	on:				
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/industrial-controls/catalogs					
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall					
Cax online generator: http://www.siemens.com/cax					
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/3RA6120-1EP32/all					
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA6120-1EP32					

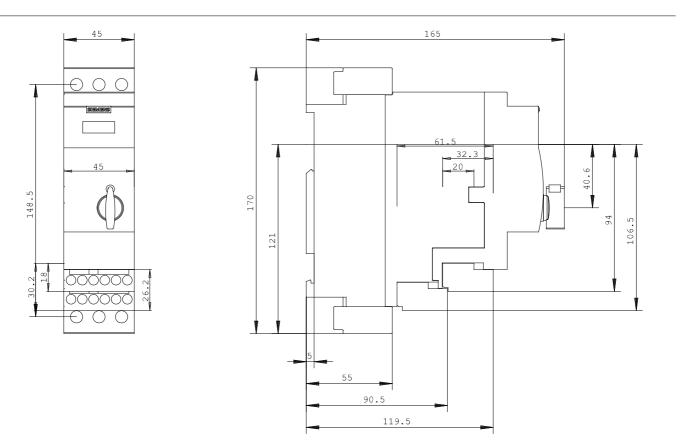

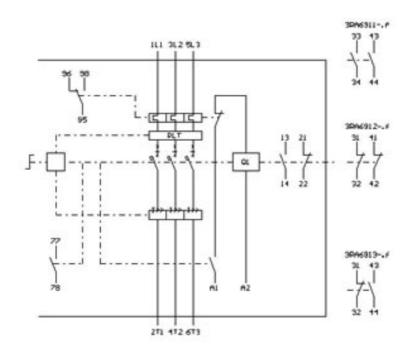

last change:

Dec 3, 2012